

NOW WITH BLUETOOTH® TECHNOLOGY

HI_CAL V2 SMART

 **SWISS
MADE**

 mini-USB

 RS232

 **Bluetooth®**



Our new Hi_Cal V2 Smart is now equipped with our very popular Bluetooth® data transmission system, better repeatability and improved construction to ensure reliability.




Lightweight

Compact and lightweight column, easy to handle, without any air cushion.



IOT ready

You can now choose between 3 Bluetooth® connection profiles, manage the battery life, the calibration and much more...




Up and down measurements

You can easily measure groove width, distance or diameter.

TECHNICAL FEATURES

- 1D workshop motorized measuring column with Bluetooth® wireless technology
- Intuitive functions
- Battery integrated
- 150, 300 and 450mm versions
- Display 0.001mm
- Mini-USB, RS232 and Bluetooth® data outputs
- Automatic pre-positioning of the probe by the Sylcom software

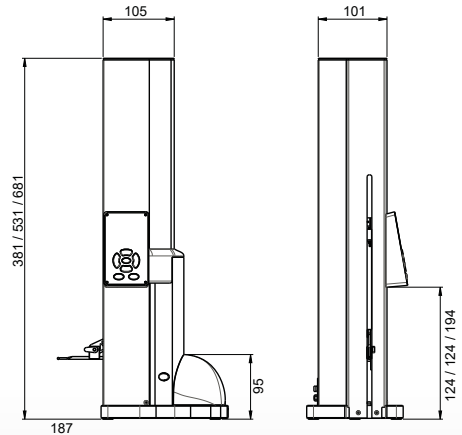



TECHNICAL DATA

Specifications	830-0156	830-0306	830-0456
Measurement range	150mm	300mm	450mm
Resolution	0.01 / 0.001 / 0.0005 mm		
Max. error	2.0 + L(mm) / 200 ¹⁾ μm		
Repeatability	1 μm		
Autonomy	40h ²⁾		
Velocity	100mm/s		
Measuring force	0.25 - 0.35 N		
Functions	Programmable by PC, zero setting, Min/Max/Delta, Preset, 2 references, Height measurement, diameters and centerlines		
Output data	Bluetooth® wireless technology / RS232 / USB		

1) With standard probe, in laboratory conditions

2) 8h/d at 20% use, 16h/d sby

APPLICATION EXAMPLES

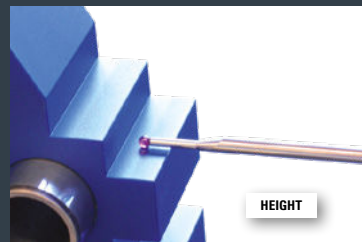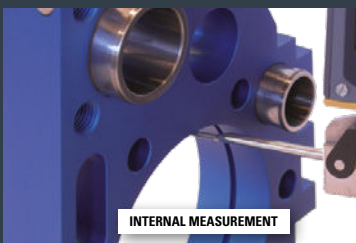

Discover the benefits of the new Hi_Cal V2 Smart, **you will love it!**

The Bluetooth® word mark and logos are registered trademarks owned by the Bluetooth SIG, Inc. and any use of such marks by Sylvac is under license. Other trademarks and trade names are those of their respective owners.